

# RCR&A

## RICHARD C. RINKS & ASSOCIATES, INC.

Engineering and Architectural Services

Building Enclosure Consultants

ASCE - NSPE - TSPE - IIBEC - EDI

30 North Jefferson Avenue - P.O. Box 691 - Cookeville, Tennessee 38503-0691

Telephone 931-528-5543 Rinks-Consulting.com Facsimile 931-528-5544


**ADDENDUM 1  
CROSSVILLE RESEARCH CENTER  
ROOF REPLACEMENT & WINDOW REPAIRS  
TENNESSEE TECHNOLOGICAL UNIVERSITY  
SBC NO. 364/011-02-2025  
FEBRUARY 6, 2026**

1. Refer to Sheet C1 on Plans: Contractor shall include in Base Bid the removal and replacement of five crab orchard stone tiles near main entrance. Tiles are approximately 18"x18"x2".
2. Refer to Sheets A1 and A2 on Plans: Elevations show shelf angles running below limestone panels. Limestone panels are not to be removed. New through-wall flashing shall terminate at all brick-to-limestone junctures with an end dam.
3. See attached Clarifications.
4. Contractor shall acknowledge receipt of this addendum on Bid Form.

Attachment: Clarifications

END OF ADDENDUM

\\ttu-csv\addendum1.doc

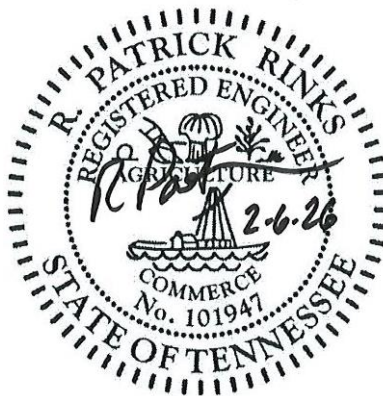

**CLARIFICATIONS  
CROSSVILLE RESEARCH CENTER  
ROOF REPLACEMENT & WINDOW REPAIRS  
TENNESSEE TECHNOLOGICAL UNIVERSITY  
SBC NO. 364/011-02-2025  
FEBRUARY 6, 2026**

Q: Is the AIA-310 bid bond ok?

**A: Yes, this is acceptable.**

Q: I don't see what we are doing with the dust collector. I read this as the duct and supports are to be removed from the roof. Does the collector remain or should we be figuring removal?

**A: It all is to be removed at least below the roof deck.**

Q: In the asbestos abatement specifications 3.04A, it states that the abatement contractor must employ a 3rd party certified air monitor to perform down wind air sampling during all abatement activities. Will this be removed in an addendum? This is very unusual for asbestos roofing and very costly.

**A: The consultant recommended we leave this requirement in the Specifications to protect the Owner.**